



EASY Downlight recessed

Description

Downlight for indoor use.

For downlighting. Structure material: Aluminium. Structure finish: Matt white. Diffuser material: Acrylic. Diffuser finish: Opal. Warranty: 5 Years.11Product net weight (Kg): 0.6551Product length (mm): 231Product width or diameter (mm): 29511Class 2. Luminaire not suitable for coating with insulation materials. Glow wire test: 650. IP: IP23. LED. No. of lampholders or LEDs: 120. LED brand: MLS. Driver brand: LXD. Maximum power of light source: 19.7W. Colour temperature: Neutral white - 4000K. Colour rendering index: 80. Hours of life: 36.000 L70B30. UGR: 20.7. % de Flickering: 35,8%. Real flux (lm): 1692. Nominal flux (lm): 2160. Lm/Real W: 77. Voltage and frequency range: 100-240 VAC. Gear included: Yes, electronic. Multi-voltage gear included. Total power: 22W. Power factor: 0.98.

Finish
Matt white
Opal

Material
Aluminium
Acrylic


TECHNICAL CHARACTERISTICS
Light source

Light source: LED MLS
Output (W): 19.7W
Total power consumption (W): 22W
Color temperature: Neutral white - 4000K
CRI: 80
Real Lumen: 1692
Nominal Lumen: 2160
Qty Leds: 120
Lm/Real W: 77
Life Time: 36.000 L70B30
Bin / Grup: 40-0A o 40-0B
UGR: 20.7

GEAR


Brand: LXD
Gear included: Yes, electronic
Voltage / Frequency:
100-240VAC/50-60Hz
Power Factor: 0.98
Flickering: 35,8%

Luminaire

Warranty: 5 Years




Logistics

Energy Efficiency: LED A++
EAN Code: 8435381452575
Net Weight (Kg): 0.655
Weight in Kg (packaged): 0.853
Packing: 310 x 45 x 310
Masterbox: 10

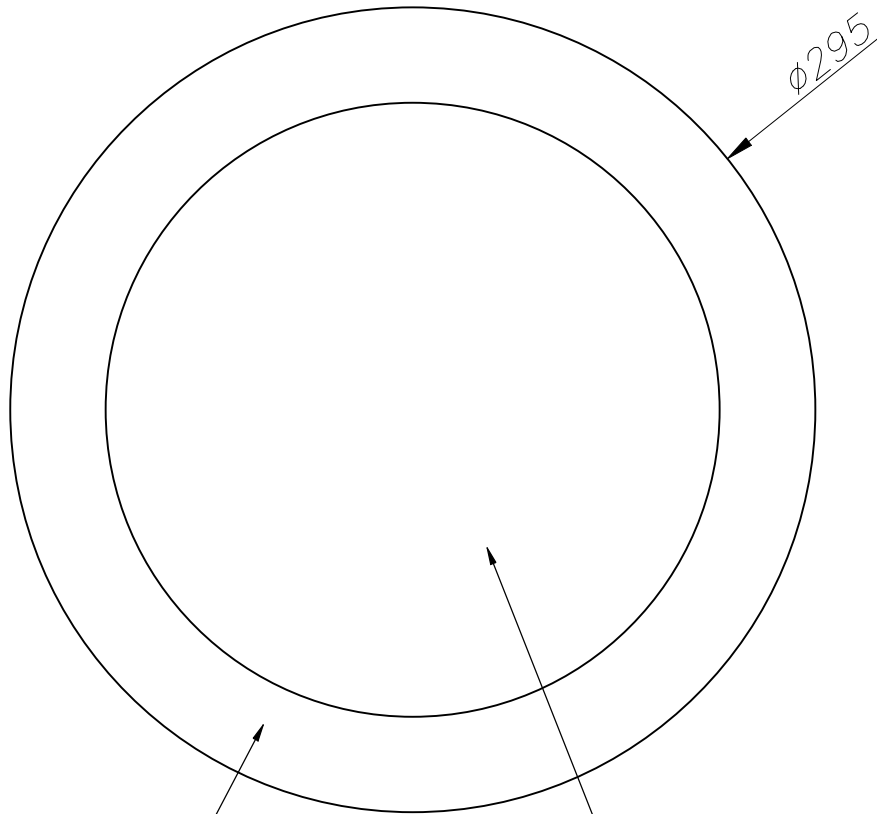

ALUMINIO INYECTADO
INJECTED ALUMINIUM

ACRÍLICO
OPAL

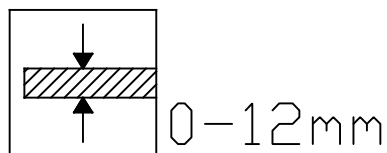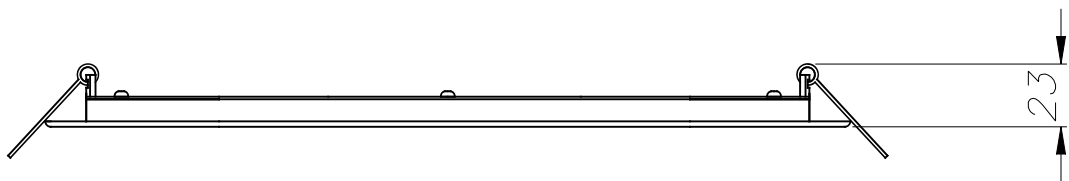

Scale 1:2

