



## TC-0412-BLA

V0


### EASY Ceiling fixture



#### Description

Recessed light fitting

For downlighting. Structure material: Aluminium. Structure finish: Matt white. Diffuser material: Acrylic. Diffuser finish: Opal. Warranty: 5 Years.11Product net weight (Kg): 1.3401Product width or diameter (mm): 4001Product height (mm): 3511Class 2. IP: IP20. LED. No. of lampholders or LEDs: 150. LED brand: MLS. Driver brand: N/A. Maximum power of light source: 26.4W. Colour temperature: Neutral white - 4000K. Colour rendering index: 80. Hours of life: 36.000h L70B30. UGR: 19.7. Photobiological risk: RG1. % de Flickering: 50,8%. Real flux (lm): 2458. Nominal flux (lm): 3375. Lm/Real W: 84. Voltage and frequency range: 100-240 VAC. Voltage: 2.9 V. Intensity: 60 mA. Gear included: Yes, electronic. Total power: 29.3 W. Power factor: 0.97.



#### Finish

Matt white  
Opal

#### Material

Aluminium  
Acrylic



#### TECHNICAL CHARACTERISTICS

##### Light source

Light source: LED MLS  
Output (W): 26.4W  
Total power consumption (W): 29.3 W  
Color temperature: Neutral white - 4000K  
CRI: 80  
Real Lumen: 2458  
Nominal Lumen: 3375  
Qty Leds: 150  
Lm/Real W: 84  
Life Time: 36.000h L70B30  
Bin / Grup: 40-0A o 40-0B  
UGR: 19.7  
Photobiological risk: RG1

##### GEAR

Brand: N/A  
Gear included: Yes, electronic  
Voltage / Frequency:  
100-240V/50-60Hz  
Power Factor: 0.97  
Flickering: 50,8%


##### Luminaire

Warranty: 5 Years

##### Logistics


Energy Efficiency: LED A++  
EAN Code: 8435381495183  
Net Weight (Kg): 1.340  
Weight in Kg (packaged): 1.700  
Packing: 410 x 410 x 45  
Masterbox: 5

The photograph may not match the reference exactly. Please read the product description to identify the finish.

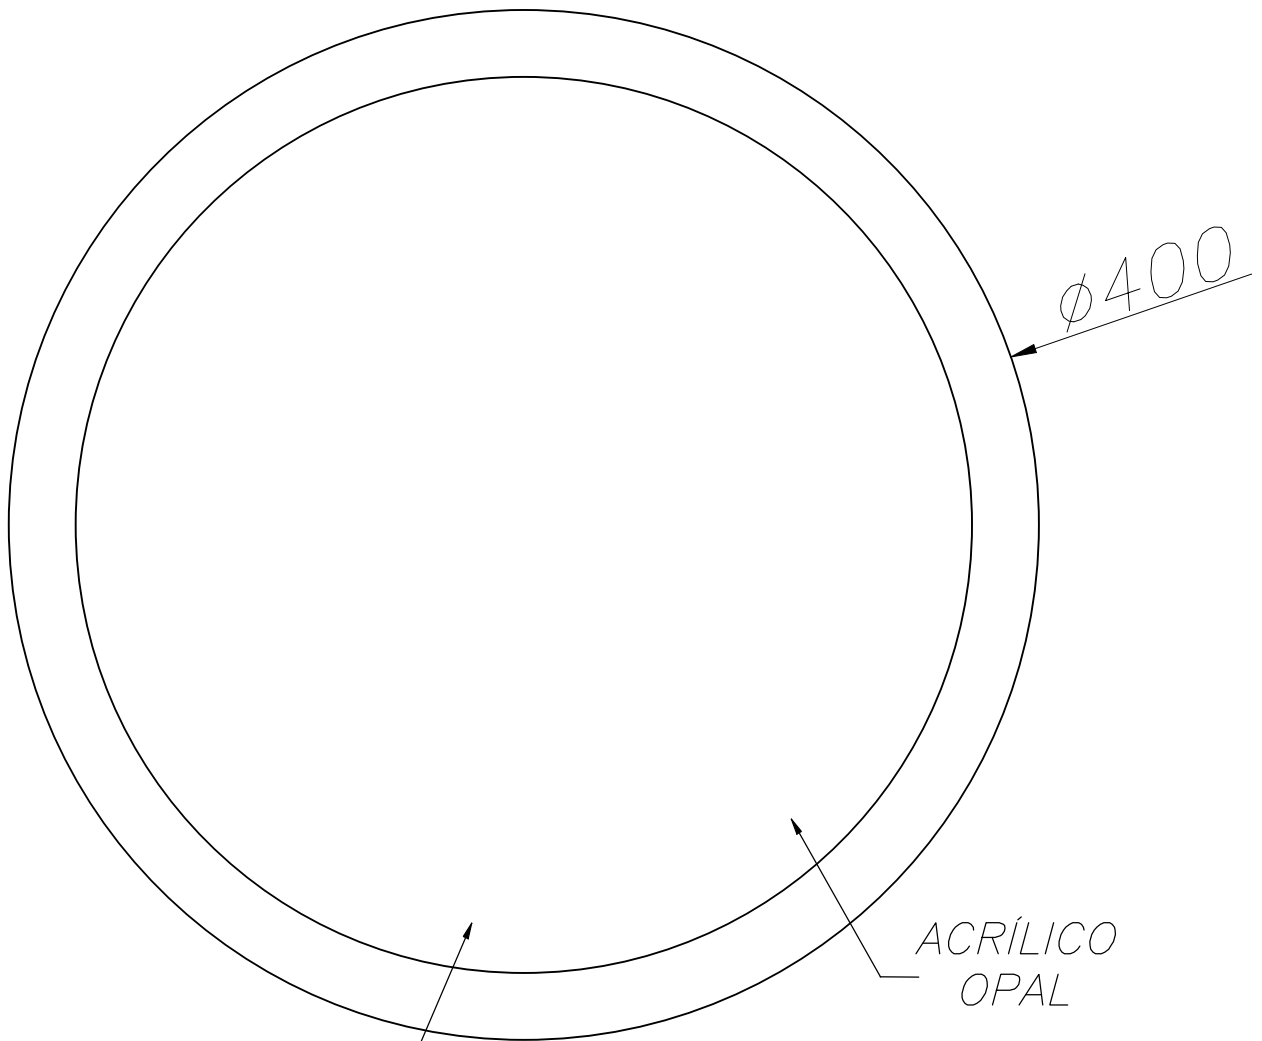



ALUMINIO INYECTADO  
INJECTED ALUMINIUM

ACRÍLICO  
OPAL




PLANTILLA DE INSTALACIÓN  
INSTALLATION TEMPLATE




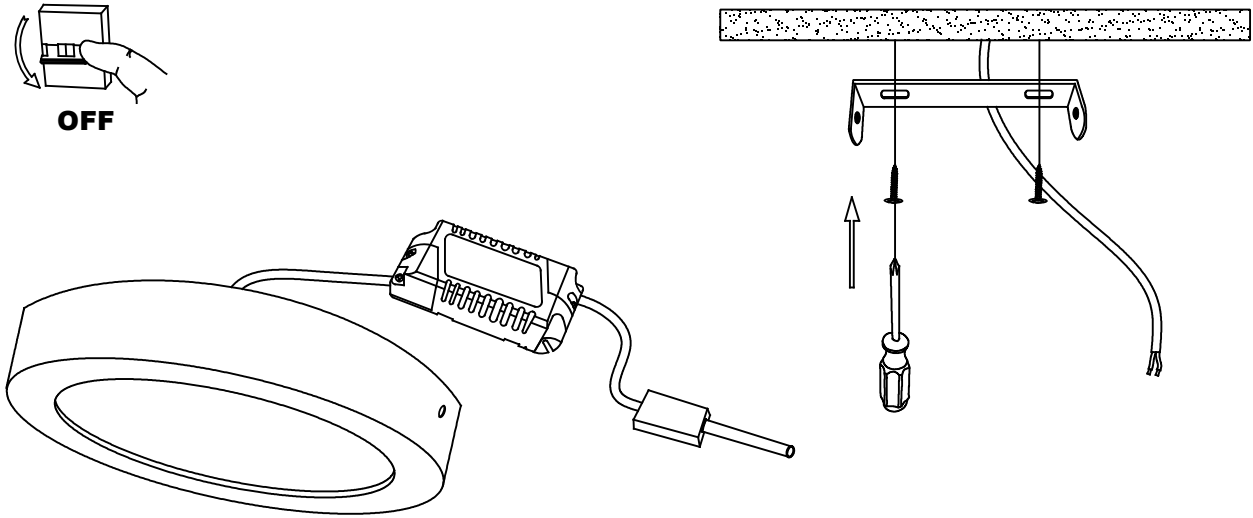

②

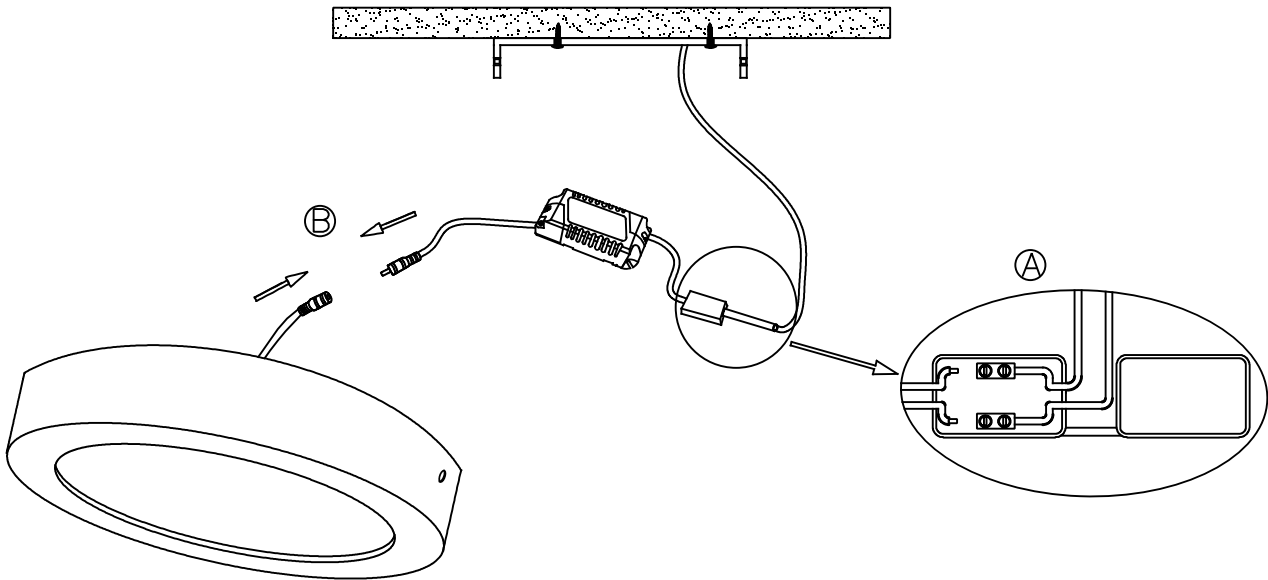

③

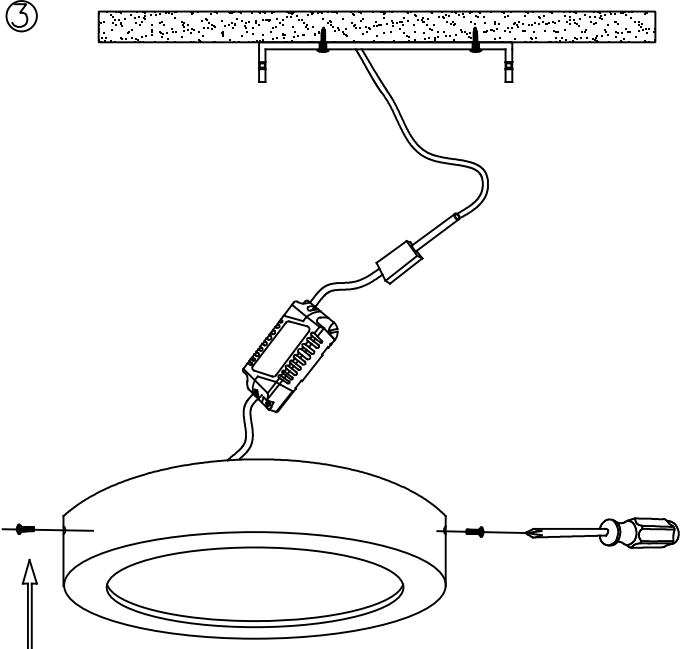

④

