
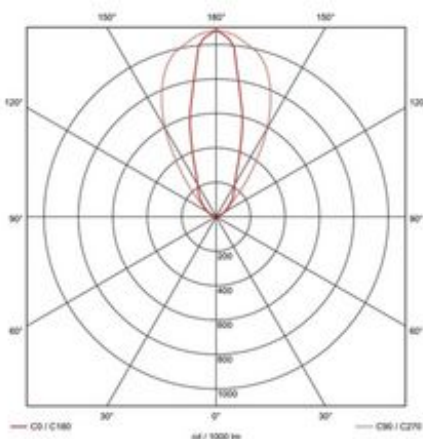
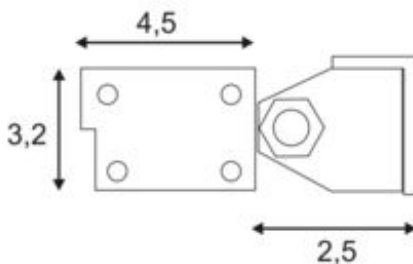


GALEN LED PROFILE

outdoor façade light, LED, 6500K, IP65, 1 m, silver-grey, 25W

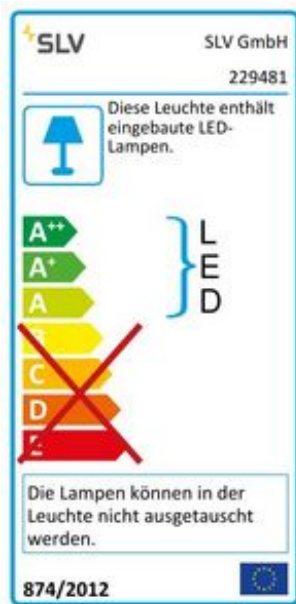

Article number	229481
LBS code	Power LED 1W
Number of light sources	18
Length	100 cm
Max. wattage	25 Watt
Beam angle	25 Degree
Luminous flux	1070 lm
Lamp	Power LED 1W
Light distribution type 1	Direct
Light distribution type 3	Axis-symmetric
Feed-in capability	No
Lamp included	No
Tilt range	120 Degree
Width	100 cm
Height	3.2 cm
Depth	7 cm
Net weight	1.655 kg
Gross weight	1.897 kg
Voltage	24 Volts
Protection class	III
IP-rating	IP 65
Material	Aluminium/glass
Colour	Silver-grey
Way of mounting	Surface wall / Surface floor / Surface ceiling mounting
Remark 1	Operate with LED power supply 470506 or 470544
Remark 2	150 cm connection lead incorporated
Average lifespan	30000 Hours
Colour temperature	6500 Kelvin
Colour rendering index	70
Energy efficiency	A++

class	
fastCalcEnabled	No
ranking	300
Catalogue page	BIG WHITE 2017: 609

Aluminium panel equipped with 18 powerful LEDs for effective lighting. Thanks to the pre-fitted installation bracket, it can be installed directly on the wall, ceiling and floor. With IP65 protection class, the tiltable panel is also suitable for outdoor use. The electrical connection of the panel available in daylight white and warm-white is done using the built-in connection lead to a 24V DC voltage power supply. This luminaire contains built-in LED lamps. EEL A - A++ The lamps in the luminaire cannot be replaced.